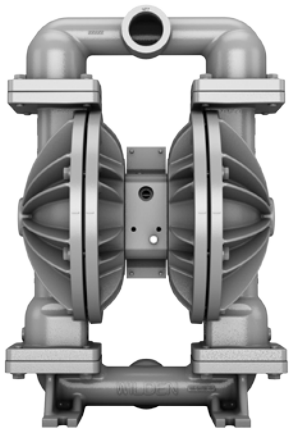

PS820 ALUMINUM

CLICK TO VIEW MODEL

PERFORMANCE

PS820/PS830 ALUMINUM EZ-INSTALL TPE-FITTED

Max. Flow Rate.....704 lpm (186 gpm)
Max. Inlet Pressure .....8.6 bar (125 psig)
Max. Solids Passage..... 6.4 mm (1/4")
Max. Suction Lift.....6.4 m Dry (21.0')
9.0 m Wet (29.5')

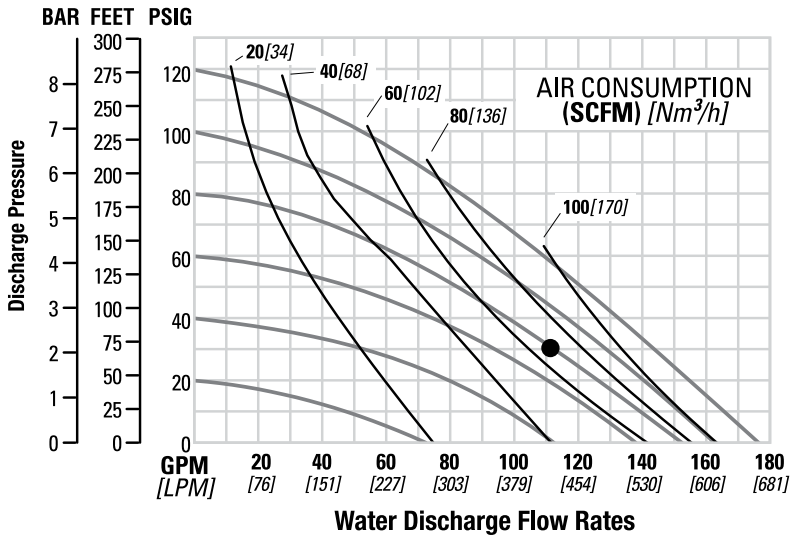

Click button to view Performance Curve EZ-INSTALL TPE-FITTED | RUBBER-FITTED

PS820/PS830 ALUMINUM FULL-STROKE PTFE-FITTED

Max. Flow Rate.....673 lpm (178 gpm)
Max. Inlet Pressure .....8.6 bar (125 psig)
Max. Solids Passage..... 6.4 mm (1/4")
Max. Suction Lift.....6.1 m Dry (20.0')
9.0 m Wet (29.5')

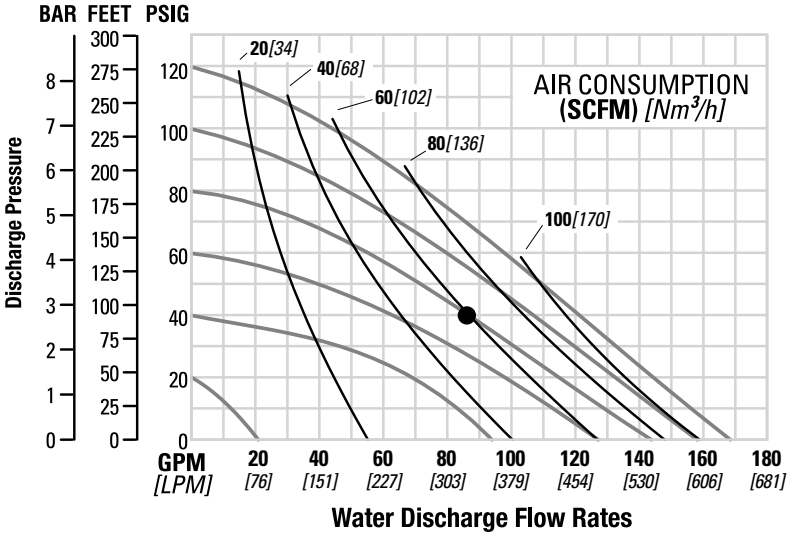

WILDEN®

22069 Van Buren Street
Grand Terrace, CA 92313-5607 USA

O: +1 (909) 422-1730 F: +1 (909) 783-3440
www.psgdover.com

PSG® a DOVER company
psgdover.com