


Where Innovation Flows


When Performance Matters, Maximize the Full-Stroke

When the job requires peak performance and maximum containment, Wilden's PTFE Full-Stroke Diaphragm delivers the suction lift, life, flow rates, efficiency and reliability needed to get the job done safely and securely. Wilden's full-stroke diaphragm technologies provide greater productivity with increased displacement per stroke for enhanced suction lift, flow rates and operating efficiencies.

Conventional Diaphragm
 During Discharge Stroke

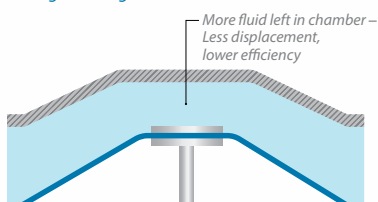

Full-Stroke PTFE Diaphragm
 During Discharge Stroke

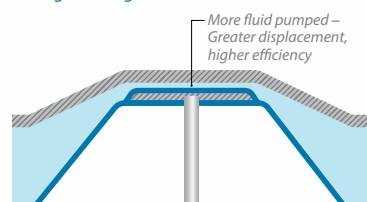

2.4x the displacement per stroke of conventional diaphragms

Features & Benefits:

- Superior flow rates and reliability
- Higher efficiency (utilizes the full stroke to push more fluid per quantity of air consumed)
- 115% increase in suction lift capability
- Reduces flex creases, minimizing a critical failure mode and increases diaphragm life
- Simplified inventory (uses existing rubber and TPE shaft and piston assemblies)
- Wide temperature range: 4°C to 104°C (40°F to 220°F)
- Complies with Requirements of:



Genuine **WILDEN**
Accept Nothing Less

Performance When It Matters

Full-Stroke PTFE Diaphragm Overview

- Maximum efficiency in operational performance and air consumption
- PTFE is the optimal choice for hygienic or aggressive chemical applications
- Excellent for highly aggressive fluids such as aromatic or chlorinated hydrocarbons, acids, caustics, ketones, aldehydes and acetates
- Features an exceptionally smooth, contoured shape with the same shaft and hardware utilized by Wilden's current rubber and Thermoplastic Elastomer (TPE) diaphragms
- Features a Wil-Flex™ or Saniflex™ backup diaphragm
- Wil-Gard™ diaphragm containment alarm system available as an accessory

Compatibility

- Wilden AODD pumps, including FDA Series for enhanced containment & cleanability
 - 25 mm (1")
 - 38 mm (1-1/2")
 - 51 mm (2")
- Wilden High Pressure Pumps, Ductile Iron and Stainless Steel
 - 25 mm (1") H200
 - 51 mm (2") H800
- Wilden Hygienic™ Series pumps
 - 25 mm (1")
 - 38 mm (1-1/2")
 - 51 mm (2")

Contact Your Authorized Wilden Distributor Today
WildenDistributor.com

For more information on Wilden's innovative diaphragm technology, visit: WildenDiaphragms.com



WILDEN[®]
Part of Pump Solutions Group
A DOVER COMPANY

22069 Van Buren Street, Grand Terrace, CA 92313-5651
Telephone 909-422-1730 • Fax 909-783-3440
www.wildenpump.com

Authorized PSG[®] Partner:

G&W Industrial Sales

915 Emerson Avenue
Parkersburg, WV 26104
304-422-4755
mail@gwindustrial.com